

PARTS LIST:

1	Driver/Left Taillight Guard	6	6-1.00mm x 20mm Phillips Bolts
1	Passenger/Right Taillight Guard	8	6mm ID x 18mm OD x 1.6mm Flat Washers
2	Support Brackets	2	6mm Nylock Nuts
		2	ST4.2 x 13mm Sheet Metal Screws
		2	4mm ID x 9mm OD x 1mm Flat Washers



Support Brackets



PROCEDURE:

1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.
2. **IMPORTANT!** Cover the finish edge around the taillight housing with masking tape to protect the finish of the vehicle when removing the taillight housing and installing the Taillight Guard.
3. Open the tailgate and remove the driver's side screws holding the taillight (**Figure 1**).
4. Grasp the taillight housing with one hand and pull with your other hand gently. **NOTE:** Be sure to pull straight out towards the rear of the vehicle to avoid possible damage. This is the same procedure required to change a burned out taillight bulb in the assembly. For more info see owner's manual on replacing burn taillight bulbs.
5. Once you have removed the taillight, carefully disconnect the wire harness and set taillight aside.
6. There are two factory holes in the edge of the taillight cavity, attach one of the Support Brackets to the lower factory hole using the included (1) 6mm x 20mm Phillips Screws, (1) 6mm Nylock Nut, and (2) 6mm Flat Washers. Straighten Support Bracket and tighten it at this time (**Figure 2**).
7. Reconnect the wire harness and then snap taillight back into place. **NOTE:** The bend end of the Support Bracket should be facing the rear of the vehicle (**Figure 3**).
8. Position Taillight Guard over taillight and attach it to vehicle using the included (2) 6mm x 20mm Phillips Bolts and (2) 6mm Flat Washers (**Figure 4**).
9. Attach the Taillight Guard to Support Bracket using the included (1) ST4.2 x 13mm Sheet Metal Screw, and (1) 4mm Flat Washer (**Figure 5**).
10. Adjust Taillight Guard properly, and then tighten all hardware at this time.
11. Repeat steps 2 – 10 for passenger side Taillight Guard.
12. Do periodic inspections to the installation to make sure that all hardware is secure and tight.

To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

For stainless steel: Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Taillight Guard.

For gloss black finishes: Mild soap may be used to clean the Taillight Guard.

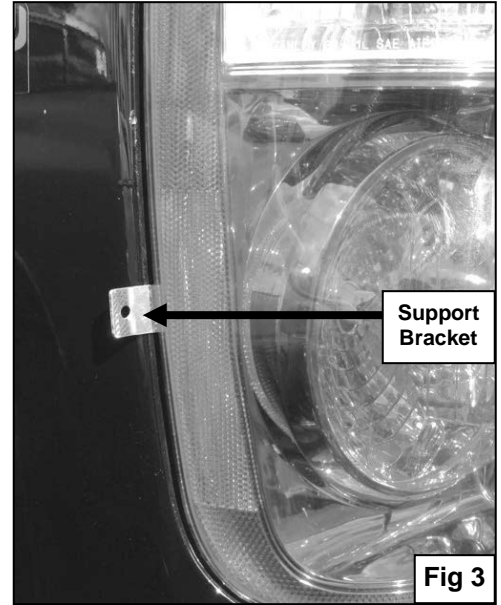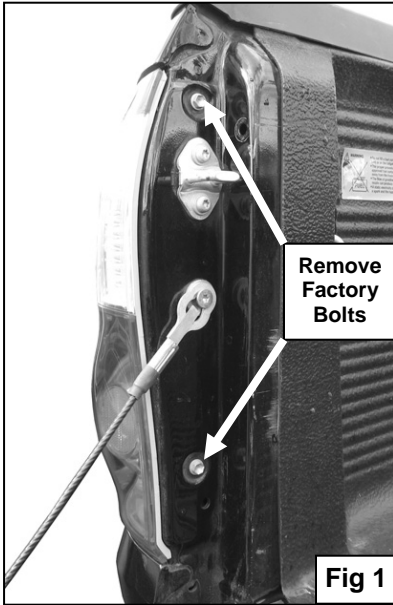

6mm x 20mm Phillips Bolts
6mm Flat Washers



ST4.2 x 13mm Sheet Metal
Screw
4mm Flat Washer

